




Optimum efficiency and reliability



Dimensions

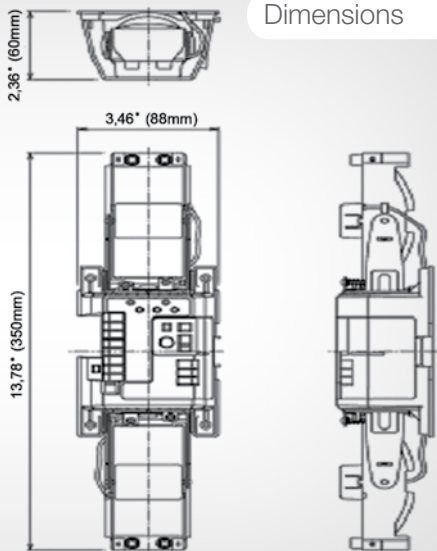

Available to cover up to 200m, this infrared beam feature a unique Double Modulated Beam signal making them extremely resistant to both direct and reflected sunlight up to 50,000 lux.

Combined with our Programmed AGC (Auto Gain Control) circuit, the QBT provides fantastic reliability, ensuring maximum protection in all weather conditions.

Quad beam detector specifically designed to withstand the harsh marine environment.

MAIN FEATURES

- Easy installation thanks to special beam bracket supports (PTKH & BEAG accessories)
- Up to 200m protection distance.
- 4 selectable frequency channels to avoid overlapping.
- Anti-Fog & Programmed AGC function.
- Excellent immunity to sunlight & reflected light up to 50.000 Lux.

QBT-200

INFRARED BEAM

NOTES


Quad photoelectric beam sensor.

- Outdoor distance detection >200m.
- Four frequency selections.
- Programmed AGC function.
- Audible signal for alignment.

SPECIFICATIONS

Detection System	Near infrared beam interruption system. (TR-RE. 4 beams simultaneous interruption).
Infrared Beam	Double modulation pulsed beam by LED
Protection Distance	200 mts Ext or 400mts Int.
Alarm Output	Dry contact relay output 1c
Response Time	50msec. A 700 msec
Tamper Output	Dry contact relay: 1b, N/C
Alarm LED	Red LED (receiver) lights when alarm is initiated
Beam Adjustment C	Horizontal: $\pm 90^\circ$, Vertical: $\pm 10^\circ$
Functions	Modulated beam frequency selection, Tone indicator, Environmental module, Beam power selection, Alarm memory indication, Programmed AGC, Auto-gain lock function, Monitor jack.


1 Linear protection

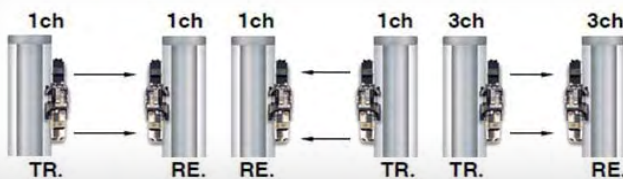


2 Double stack protection




3 Double stacked linear protection

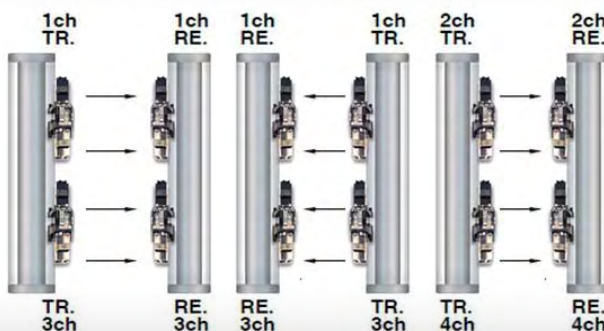

4 Perimeter protection

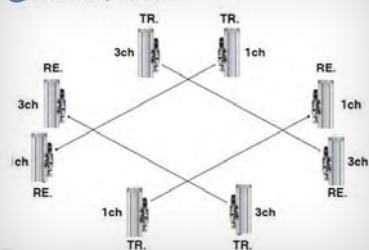

5 Perimeter double stacked protection

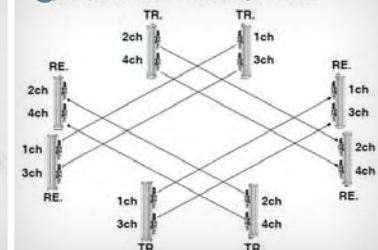

Beam Frequency change:

The beams pairs may be set at various frequency levels to avoid crosstalk between units which are stacked, in line, or other configurations.



The towers must be mounted firmly and you have to verify the ground to avoid possible obstacles between the transmitter and the receiver. Also, the ground must be free of trees, shrubs or other things that might interfere with the beams operation.

